



# Jabra CRUISER2 Motherboard Replacement

Follow this guide to remove the motherboard from the device if it needs to be replaced or repaired.

Written By: Spartacus



## INTRODUCTION

The motherboard is the most important part of the Jabra CRUISER2. It controls the device. This guide will tell you step-by-step how to remove the motherboard so you can replace it with a functioning one.

---

### TOOLS:

- [Phillips #000 Screwdriver](#) (1)
  - [iOpener](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Microwave](#) (1)
  - [Soldering Station](#) (1)
-

## Step 1 — Front Plate



- Use the iOpener tool to unglue the adhesive of the device. The link to the iOpener instructions are listed below.
- [iOpener Instructions](#)


## Step 2



- Place the flat head of the bigger plastic opening tool in between the front plate and back plate.
- Pull the tool toward the back of the device to pry it open.
- Repeat this process over all edges of the device.





## Step 3

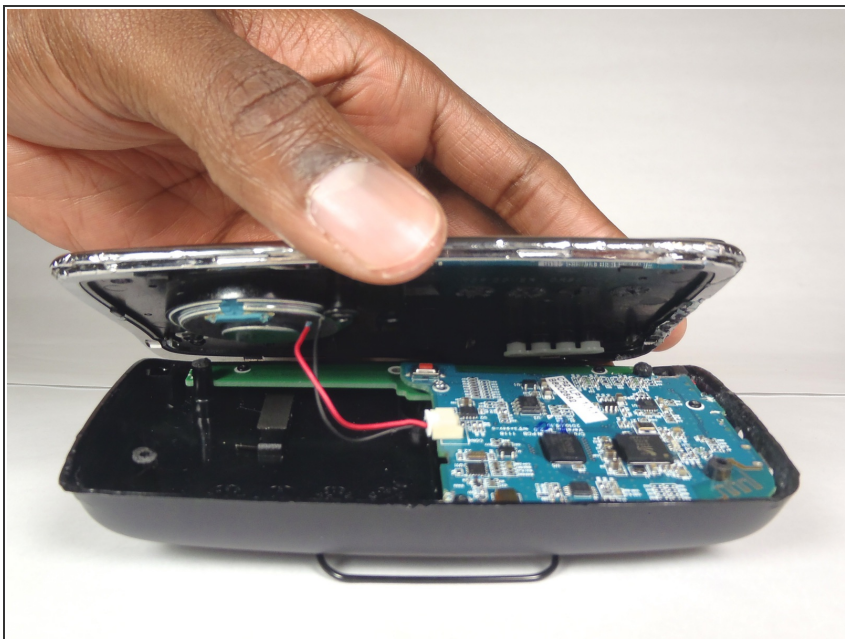


- Open up the device by pulling the front plate straight up from the back plate.

## Step 4 — Motherboard

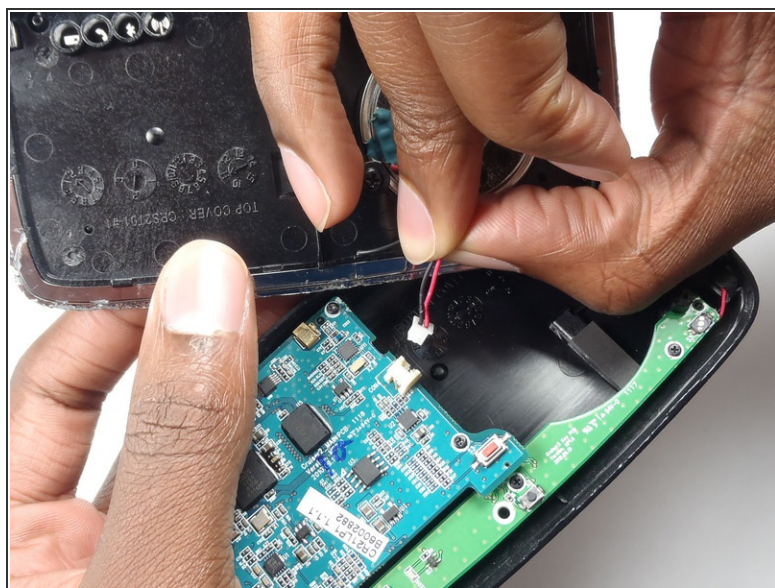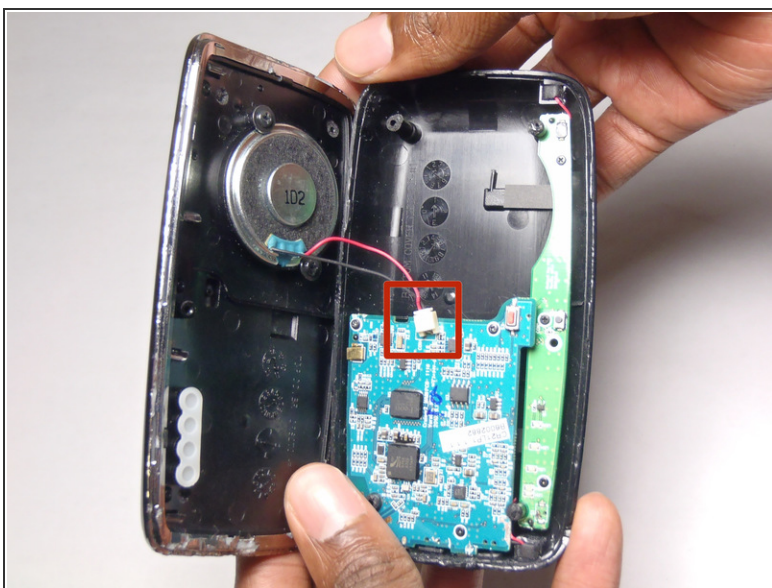


- Carefully detach the wire running from the speaker to the motherboard by unplugging it from the white socket.

## Step 5

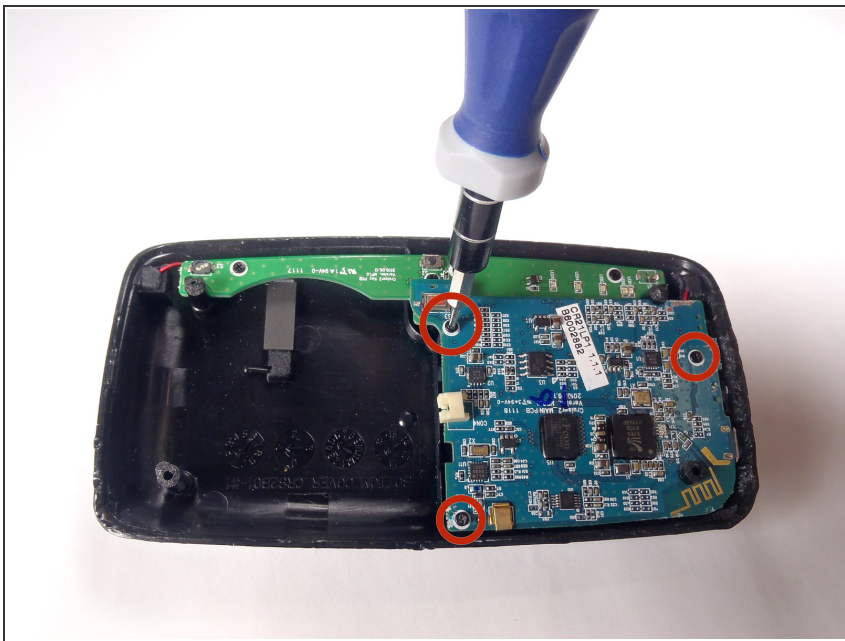

- Using the PH000, unscrew the three 4.55 mm screws in the motherboard.
- The names of the screwdriver heads are listed on the sides of each head.

## Step 6

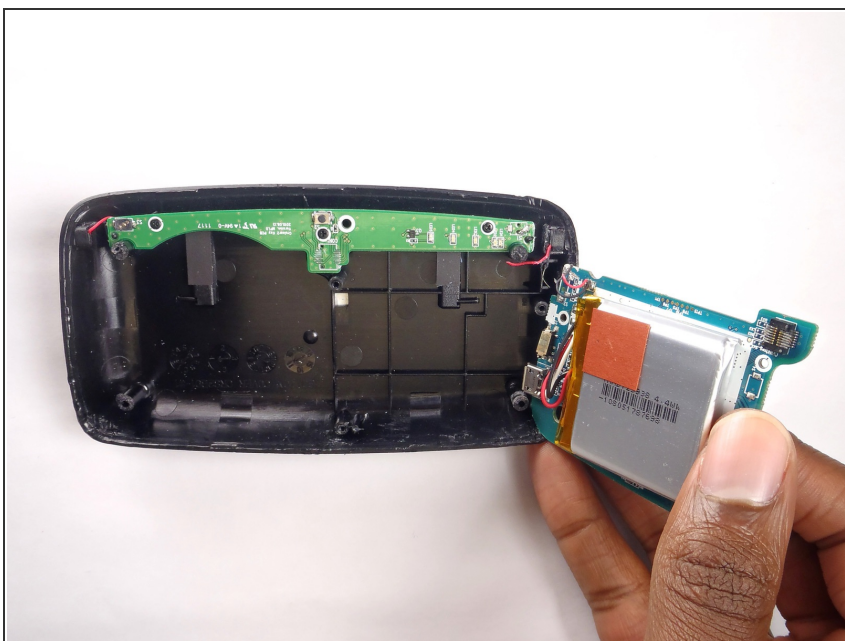

- Remove the motherboard from the device by lifting it up from the back plate.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 09:20:56 AM.